


# NOS ATEX Portable Gas Booster

# NOS

## Specification

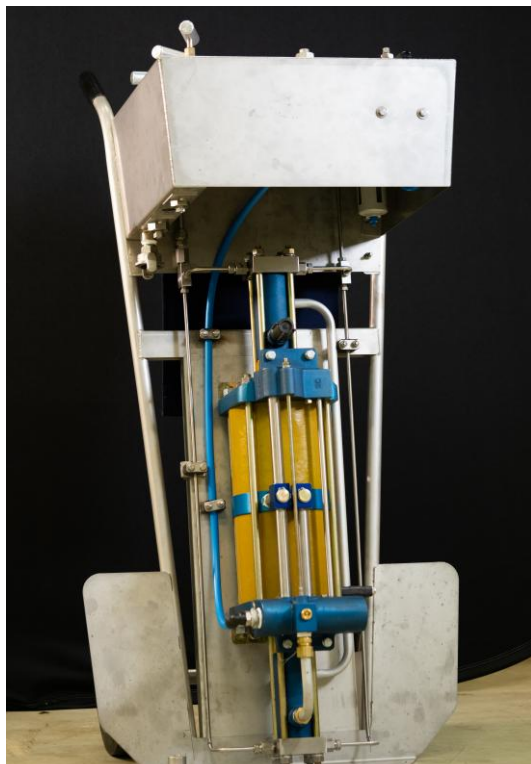

**NOS ATEX Gas booster** is a Highly portable high pressure gas booster made for use offshore. The double head design allows for half input pressure to achieve the same outlet pressure as normal gas boosters.

<b>C-Pump on Frame</b>	
<b>Approvals</b>	Norsok Z-015,
<b>Area Classification</b>	ATEX II2 G D c T4 Zone 1
<b>Z-015 Type</b>	U10
<b>Frame Envelope Size</b>	630x400x1120mm (LxWxH)
<b>Weight</b>	80kg
<b>Pump</b>	SC hydraulic GBD-D75
<b>Flow &amp; pressure</b>	
<b>MWP</b>	1380 bar
<b>Max flow</b>	2100 lpm
<b>MAX Air pressure</b>	10 bar
<b>Supply connection</b>	
<b>MAX Grease bucket size</b>	20kg
<b>Outlet</b>	1/4" MP / Configurable
<b>Outlet logger</b>	1/4" MP / Configurable
<b>Gas Inlet</b>	1/4" BSP M
<b>Air Supply</b>	1" Offshore Claw
<b>Ambient Operating temperature</b>	0 – 60 °C (below 0°C contact NOS)

# NOS ATEX Portable Gas Booster

# NOS

## Pump Curves

