


# NOS ATEX 5m3 Mixing Tank w Agitator

# NOS

## Specification

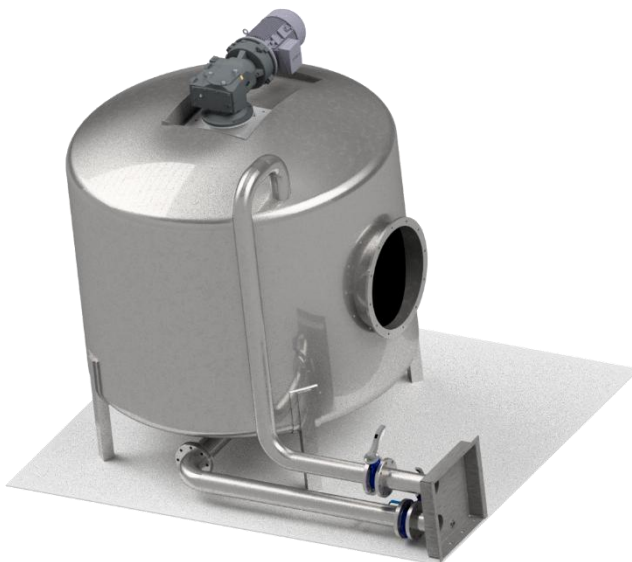

When pumping chemicals & fluids that need to be agitated to keep solids in a state of suspension. This tank can with its electrically driven agitator mix and agitate the fluid.

Integrated membrane pump can be used to pump chemicals in the tank.

Unit	
<b>Approvals</b>	Norsok Z-015, DNV 2.7-1
<b>Area Classification</b>	ATEX II2 Ex db be mb h IIB T4 Gc
<b>Z-015 Type</b>	U99
<b>Frame Envelope Size</b>	2990 x 2438 x 2673mm(LxWxH)
<b>Weight</b>	5000kg
<b>MGW</b>	10 000kg
Process Data	
<b>Tank Volume</b>	5m3
<b>Agitator Type</b>	SS 6,8-1500-600,
<b>Max RPM</b>	300 RPM
<b>Control interface</b>	PWM knob & Push button
<b>PRV tank</b>	2bar
<b>Internal supply pump</b>	1" PDA
<b>Overflow</b>	2" In Overflow hose
Supply connection	
<b>Outlet</b>	4" FIG 206 Wing
<b>Inlet</b>	4" FIG 260 Thread
<b>Power</b>	230v 16A
<b>Air Supply</b>	1" Offshore Claw
<b>Ambient Operating temperature</b>	0 – 60 °C (below 0°C contact NOS)